SaferFarm.org - Farm Hazard Analysis Tool






Roof

Least Protection

- Stapled 240 lb/square asphalt shingles or nailed wooden shingles or re-roofed nailed asphalt shingles; non-ventilated roof cavity; no drip edge barrier installed; roof installed by owner or non-certified roofing contractor.
- Nailed 240 lb/square asphalt shingles; ventilated roof cavity; drip edge barrier installed; roof installed by owner or noncertified roofing contractor.
- Nailed laminated fiberglass shingles or nailed 300 lb/square asphalt shingles; ventilated roof cavity; drip edge barrier installed; roof installed by bonded, certified, professional roofing contractor.
- 4. Nailed slate roof over reinforced truss rafters; ventilated roof cavity; drip edge barrier installed; roof installed by bonded, certified, professional roofing contractor.
- 5. Nailed clay tile or rust-resistant, clad-metal roofing; ventilated roof cavity; drip edge barrier installed; roof installed by bonded, certified, professional roofing contractor.

Most Protection

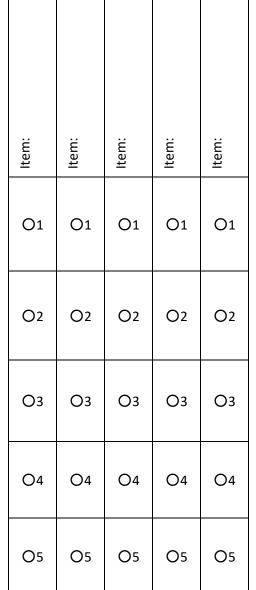

Farm:	
Inspector:	
Date:	







SaferFarm.org is a collaboration between the National Farm Medicine Center and Penn State University, supported by the following funding: CDC-NIOSH U54-OH009568 National Children's Center for Rural and Agricultural Health and Safety; CDC-NIOSH U54 0H010170 Upper Midwest Agricultural Safety and Health Center.

See Saferfarm.org for more information.