

SaferFarm.org – Farm Hazard Analysis Tool



Ag Buildings

Electrical Wiring

Least Protection

1. Wiring has only two leads; insulation is brittle; fixtures are deteriorated.
2. Type NM-B wiring has three leads with flexible insulation; fixtures are not dust and water resistant.
3. Type NM-B wiring has three leads with flexible insulation; plastic or metal fixtures are dust and water resistant.
4. Type UF-B cable has three leads with flexible insulation; fixtures are not dust and water resistant.
5. Type UF-B cable has three leads with flexible insulation; plastic fixtures are dust and water resistant.

Most Protection

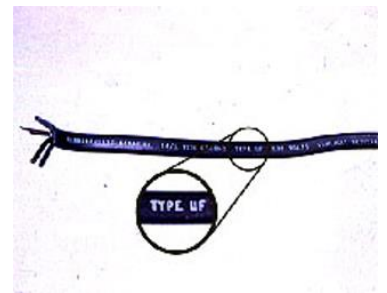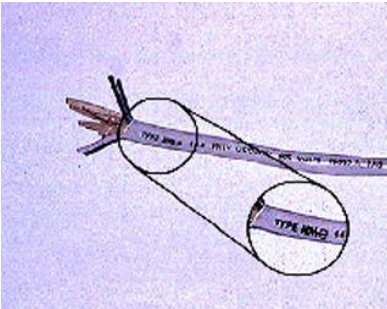

Item:	Item:	Item:	Item:	Item:
O1	O1	O1	O1	O1
O2	O2	O2	O2	O2
O3	O3	O3	O3	O3
O4	O4	O4	O4	O4
O5	O5	O5	O5	O5

Farm: _____

Inspector: _____

Date: _____